



ZHT-3080L/S Tubular Solenoids

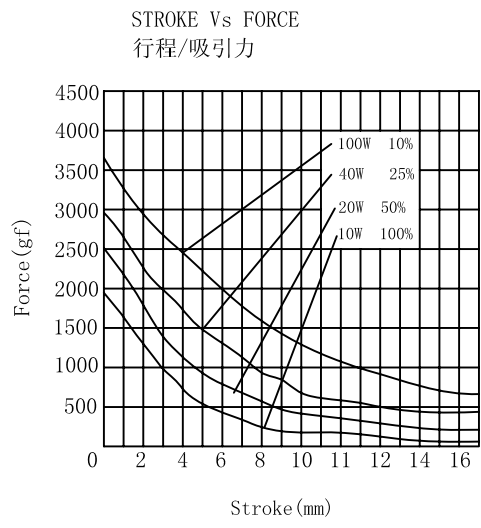

总重量 Total Weight: 420g
应用范围: 用于门禁, 门锁等

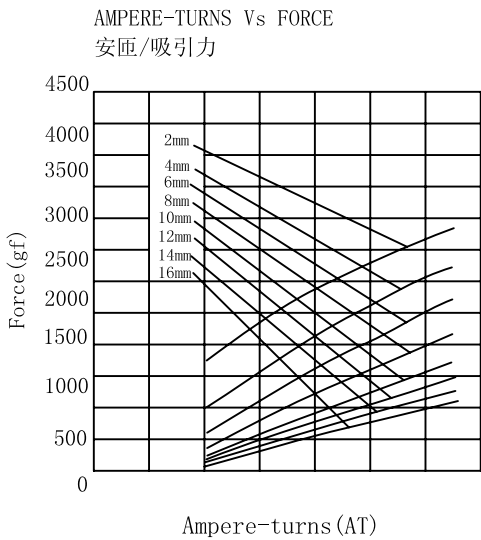

类型: 拉式 TYPE: PULL

单位:mm Units:mm 通电状态 Shown Energized

类型: 推式 TYPE: PUSH

单位:mm Units:mm 通电状态 Shown Energized

滑杆外部与负载连接的典型结构 plunger type:

- a: [Diagram]
- b: [Diagram]
- c: [Diagram]
- d: [Diagram]
- e: [Diagram]
- f: [Diagram]

顶杆外部与负载连接的典型结构 push shaft type:

- a: [Diagram]
- b: [Diagram]
- c: [Diagram]
- d: [Diagram]
- e: [Diagram]

ZHT

COIL DATA线圈资料

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$		连续 Continuous	间断 Intermittent			
工作周期 (%) = $\frac{\text{工作时间}}{\text{工作时间} + \text{断开时间}} \times 100\%$		100%	50%	25%	10%	
MAX. "on" time in seconds 最大工作时间 (秒)		∞	230	25	6	
Watts at 20° 瓦特数 (在20°)		5.5	11	22	55	
Ampere-turns at 20° 安匝值 (在20°)		738	1058	1476	2338	
Type no.	Resistance (20°C) Ω ± 10%	No. Turns	VoltS DC 电压			
型号	阻值 (Ω) ± 10%	线圈匝数				
ZHT-1632L/S	6.5	800	6	8.5	12	19
	26.2	1600	12	17	24	38
	104.7	3200	24	34	48	76
	419	6200	48	68	96	152